




## Flat

Compact and minimal designed bollard with shielded LED light source, for downward round and even light distribution. Ideal for walkways and pedestrian areas. Available 300mm and 600mm in height. Supplied with built-in driver. Pre-wired cable included. IP65 rating for outdoor use.

**2253-01**

**2253-02**

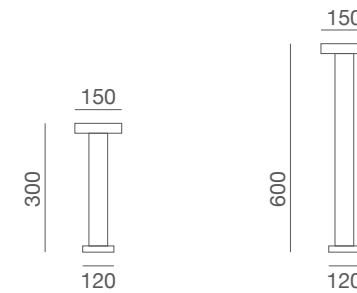

### Materials:





Powder coated aluminum body with polycarbonate diffuser, stainless steel screws

### Standard Color:

 Black

### Installation:

 Floor surface mounted

Code	Power	Input Volt	Source	Marks
2253-01	12W	100-240Vac	SMD2835 LED 3000K 1020lm	   
2253-02	12W	100-240Vac	SMD2835 LED 3000K 1020lm	